

Analog Indoor Monitor

508M-S8

508 analogue system is designed for high-rise and apartment buildings, especially for large residential area. It's a low-power consumption product, and realize long-range transmission.




Specifications:

Physical Property	
MCU	T527SA , LQFP-64
EEPROM	4KByte
Display	7" TFT LCD, 800x480
Button	Mechanical button
Device Size	221.4x151.4x16.5mm
Power	DC15V
Standby power	0 W
Rated Power	6W
Temperature	-10°C - +55°C
Humidity	20%-93%
IP Glass	IP30
Features	
Call with Outdoor Station& Management Center	Yes
Monitor Outdoor Station	Yes
Remotely unlock	Yes
Mute, Do Not Disturb	Yes
External Alarm Device	Yes
Alarm	Yes(2 Zones)
Chord Ring Tone	Yes
External Door Bell	Yes
Message Receiving	Yes(Optional)
Snapshot	Yes(Optional)
Elevator Linkage	Yes(Optional)
Ringing Volume	Yes
Brightness /Contrast	Yes
Low-power mode	Yes

Key features:

- Video intercom
- Two alarm zones for gas detector or smoke detector
- No power consumption in standby mode

Dimension & Installation:

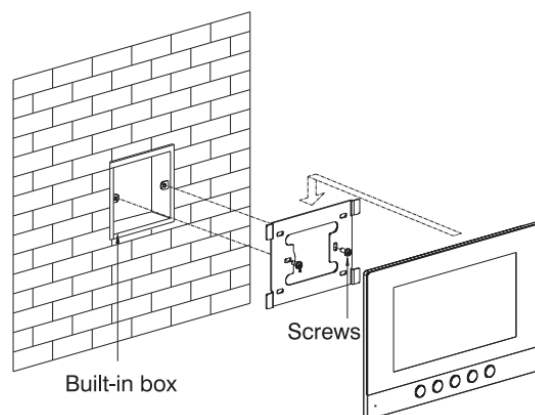

Size: 221.4*151.4*16.5mm