

# IP Indoor Monitor

## 904M-S0

With an Android operating system, Dnake SIP-based indoor monitor provides high-definition audio and video communication with outdoor station and room-to-room communication via SIP 2.0 protocol. It also allows integration with 3rd party software, elevator control system and home automation, offering an integrated security solution.




### Specifications:

Physical Property	
System	Android 6.0.1
CPU	Octal core 1.5GHz Cortex-A53
Memory	DDR3 1GB
Flash	4GB
Display	7" TFT LCD, 1024x600
Button	Piezoelectric/Touch(optional) Button
Power	DC12V/POE
Standby power	3W
Rated Power	10W
TF Card & USB Support	No
WIFI & Bluetooth	Optional
Temperature	-10°C - +55°C
Humidity	20%-85%
Audio & Video	
Audio Codec	G.711/G.729
Video Codec	H.264
Screen	Capacitive, Touch Screen
Camera	Yes(Optional), 0.3M Pixels
Network	
Ethernet	10M/100Mbps, RJ-45
Protocol	SIP,TCP/IP, RTSP
Features	
IP Camera Support	8-way Cameras
Door Bell Input	Yes
Record	Picture/Audio/Video
AEC/AGC	Yes
Home Automation	Yes(RS485)
Alarm	Yes(8 Zones)

### Key features:

- UI customization
- Compatible with 3<sup>rd</sup> party software
- Support external 8-way IP cameras
- Integration of elevator control and home automation
- Standard SIP 2.0
- Android based
- PoE

### Dimension & Installation:

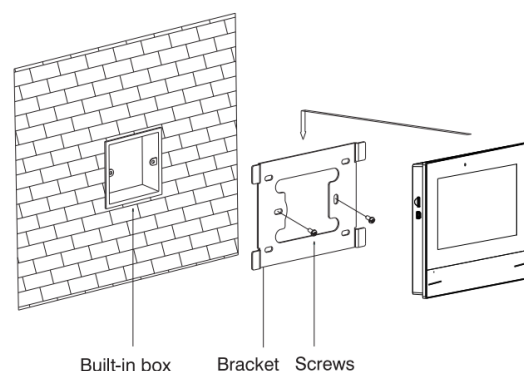

Size: 220\*166.5\*16.5mm